




AMERICAN SERIES - 35601L

Wobble Stator Progressive Cavity Pump



American 35601L

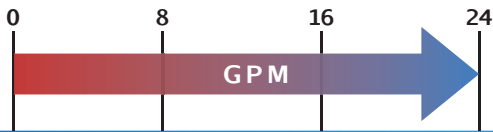

0-24
GPM

0-50
PSI

Features

- Low Cost
- Low Shear
- Solids Handling
- Compact Design
- Direct Motor Speeds
- Gear Reduction Options

Materials

Rotor: *Stainless Steel Chrome-Plated*

Stator: *Buna, Viton™, EPDM*

Motor: *1/2, 3/4, 1, 1.5, and 2 hp*

Inlet: *Radial - 1-1/2"*

Outlet: *1-1/4"*

Bases: *Steel or Stainless Steel*

Pump Description

The 35601L Wobble-Stator Pump is ideal for liquid composts, liquid manure and manure-slurry pumping and spreading applications at pressures up to 50PSI and a flow range of 0-24 GPM. The simple design of the wobble stators single universal joint gives you the advantages of low pulsation, shear and solids handling of viscous liquids at an affordable price.

Manure Slurry Pumps need to be reliable, efficient, and durable for farm and agribusiness operations. The 35601L Series comes in a Long-Coupled Version that is available in Cast Iron with standard Buna Nitrile Stator, mechanical seal, and a hard-chrome plated rotor for a long service life in operations on a manure spreader or liquid-compost trailer.


The American Pump Series is offered in a Long-Coupled design for mounting on a baseplate with a standard motor. All pumps are offered "off the shelf" from our inventory for immediate shipment.

Curves

35601L

Drawings

35601L

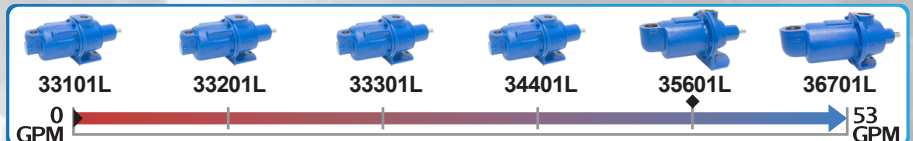

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005

www.libertyprocess.com