




LIBERTY SERIES - LL12H

Progressive Cavity Pump



Liberty LL12H



Features

- Modular Design
- Maintenance Free
- Easy Assembly/Disassembly
- Simple Pin Joint Design
- Non-Pulsating Low Shear
- NPT Discharge Connection

Materials

Rotor: Tool Steel & Stainless Steel, Chrome-Plated

Stator: Buna, Rubber, Viton™, EPDM

Motor: 3, 5, 7.5, 10, 15, 20, and 25 hp

Inlet: 8"

Outlet: 6"

Bases: Steel and Stainless Steel

Pump Description

The Liberty LL12H PC Pump is an ideal industrial-sized progressive cavity pump for abrasive pumping applications and high-viscosity industrial chemical applications like thickened grease, scum and slurries. Flow rate (65 gallons/100 revolutions) 123 up to 380 GPM and represents one of our most popular heavy duty models of Progressive Cavity Pumps for Industry currently carried by Liberty Process.

The Liberty LL12H Series PC Pump is a standard suction flanged pump manufactured with cast iron or 316 stainless steel casings and designed in 1, 2, and 3 stages for 75, 150 and 225 psi discharge pressures. The pump unit is a modular design with simple hardened pinned joint drive assembly. Rotors are typically hardened tool steel or 316 stainless steel with a hard chrome plating for long life in abrasive and erosive applications. All other wetted parts are either carbon steel or 316 stainless steel for added durability.

Stators are available in many elastomer materials such as buna, natural rubber, epdm and viton. The standard seal design is a set of gland packing with Lantern Ring and Flush Connections. Mechanical seal options are readily available. The Liberty unit is a low-cost, maintenance free, dependable drop-in replacement pump which will give you the service you need at a price you can afford.

The Liberty LL12H Progressive Cavity Pump parts are direct aftermarket replacements that work with the Moyno™ L12H Series, Tarby™ TL12H Series and Continental™ CL12H Series.*

Contact a Liberty Process representative today for more information about the LL12H Series.

Curves

[Click Links Below](#)

1-Stage
1LL12H


2-Stage
2LL12H

Drawings

[Click Links Below](#)

1-Stage
1LL12H

2-Stage
2LL12H

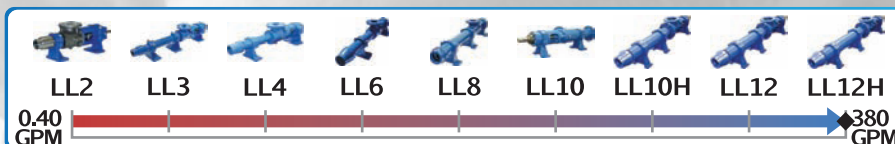




LIBERTY SERIES - 1LL12H

Progressive Cavity Pump

Performance Curves

RPM	100	200	300	400	500	600
NPSH REQ'D	1.2	2.3	3.4	5.6	8.4	11.2
MIN. HP	3	5	5	7-1/2	10	10

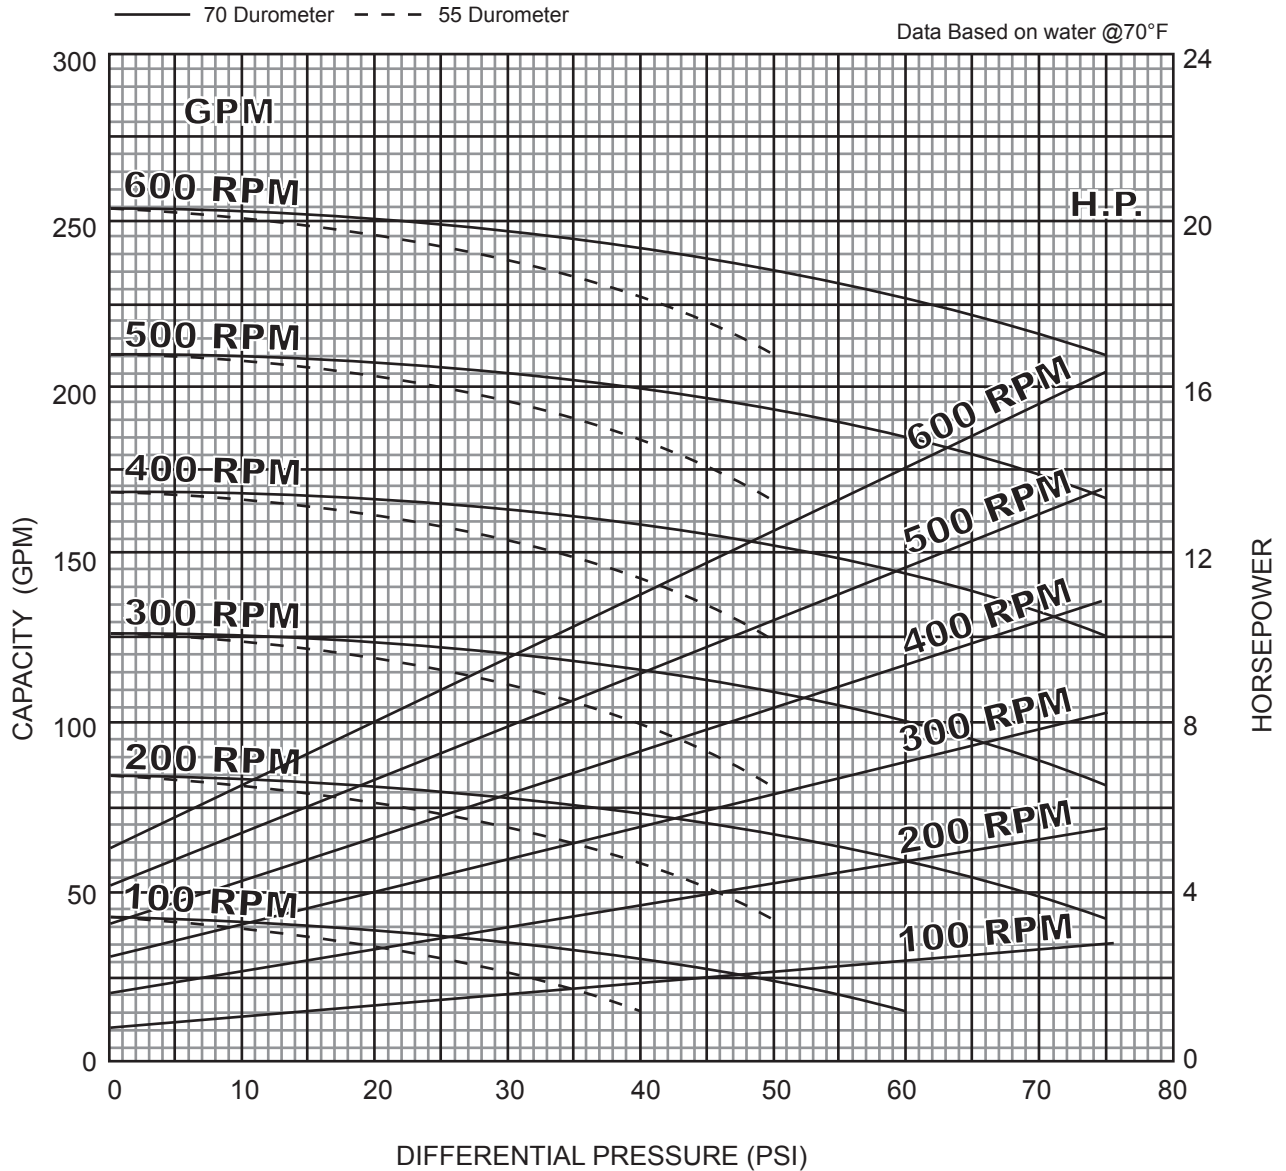

1 Stage Pump

[BACK TO TOP](#)

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005

www.libertyprocess.com




LIBERTY SERIES - 2LL12H

Progressive Cavity Pump

Performance Curves

RPM	100	200	300	400	500	600
NPSH REQ'D	1.4	2.8	4.6	8.1	11.5	15.0
MIN. HP	5	10	15	20	20	25

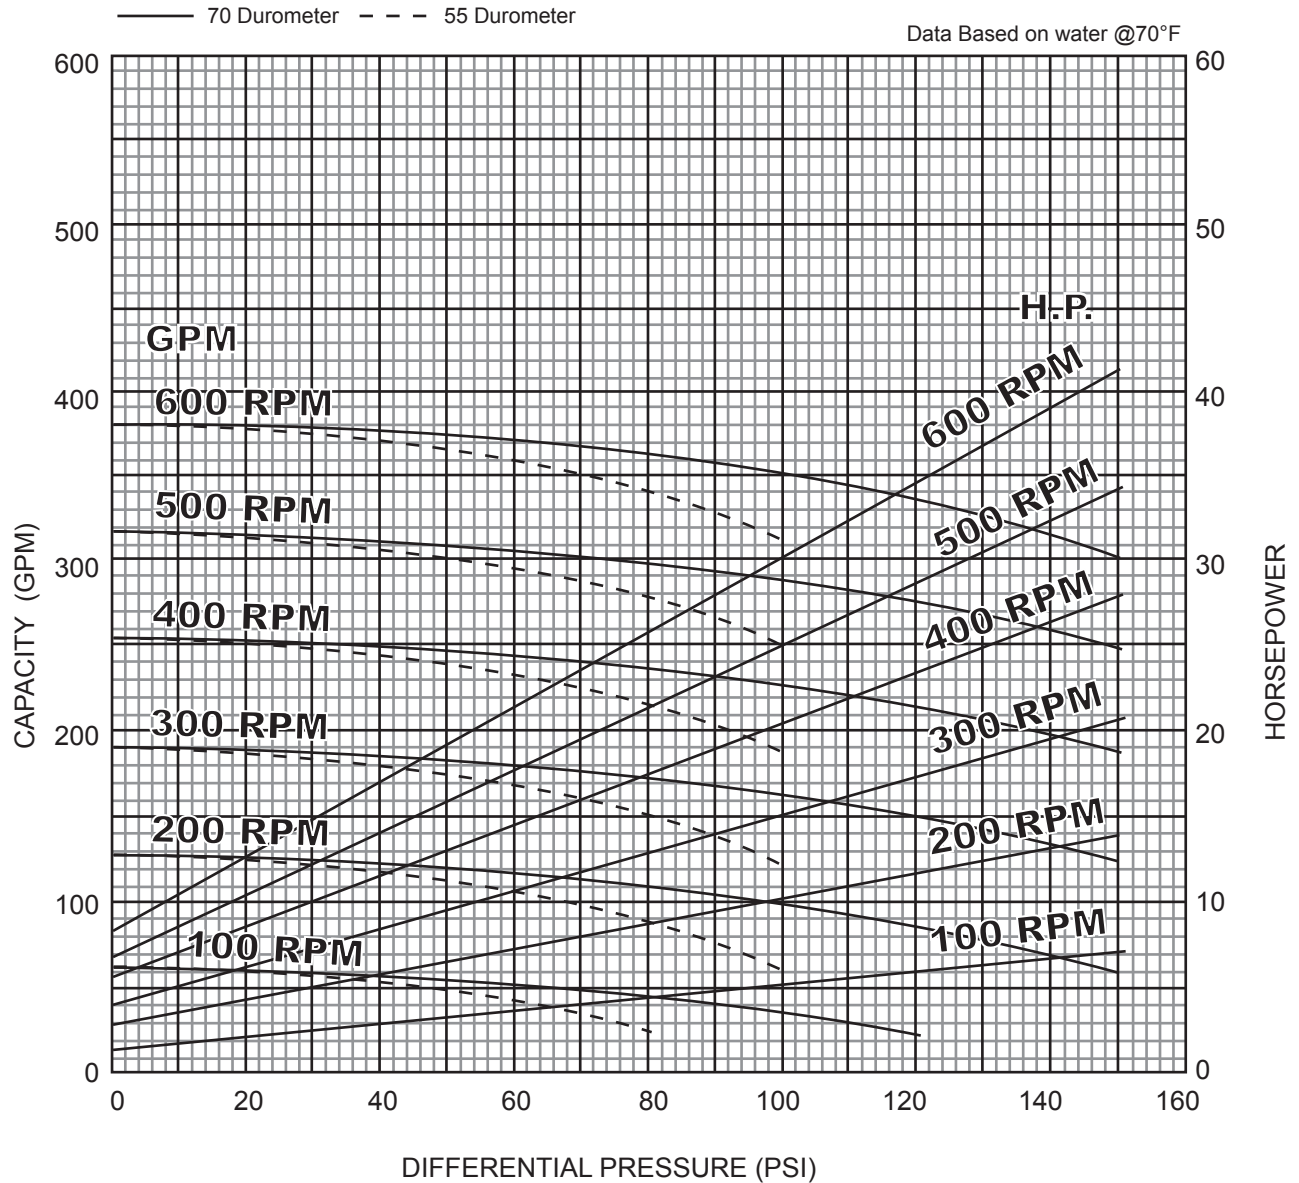

2 Stage Pump

[BACK TO TOP](#)

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005


www.libertyprocess.com



LIBERTY SERIES - 1LL12H

Progressive Cavity Pump

Dimensional Drawings

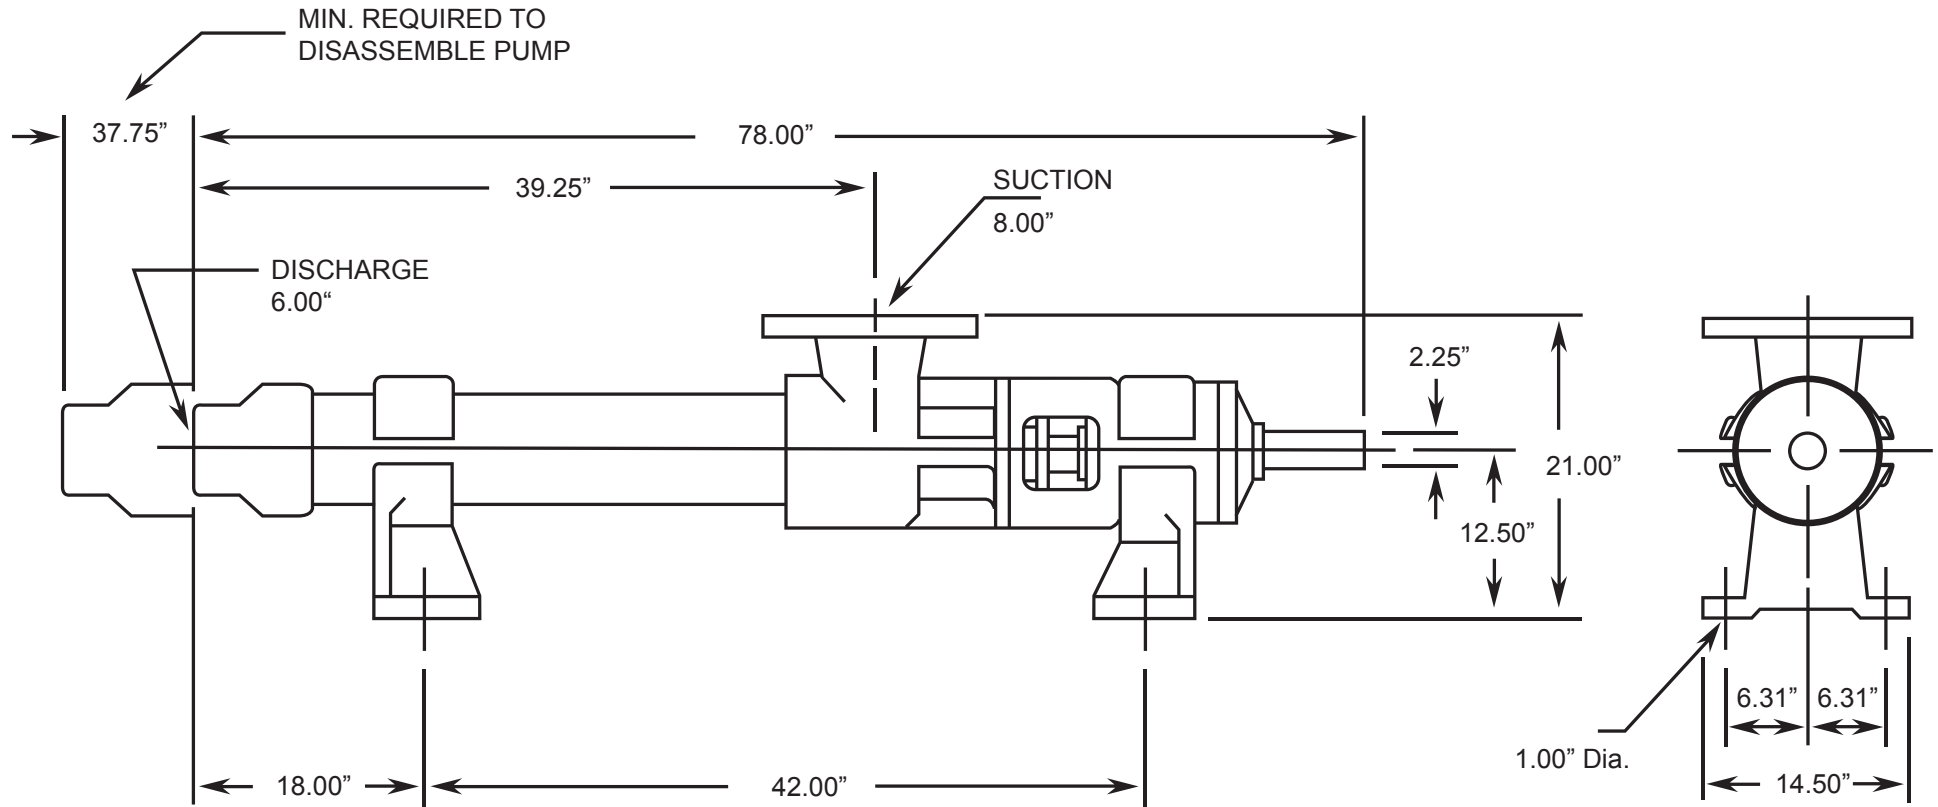

BACK TO TOP

2 Stage Pump

Net weight

≈ lbs.

945

ALL DIMN: Inches

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005


www.libertyprocess.com



LIBERTY SERIES - 2LL12H

Progressive Cavity Pump

Dimensional Drawings

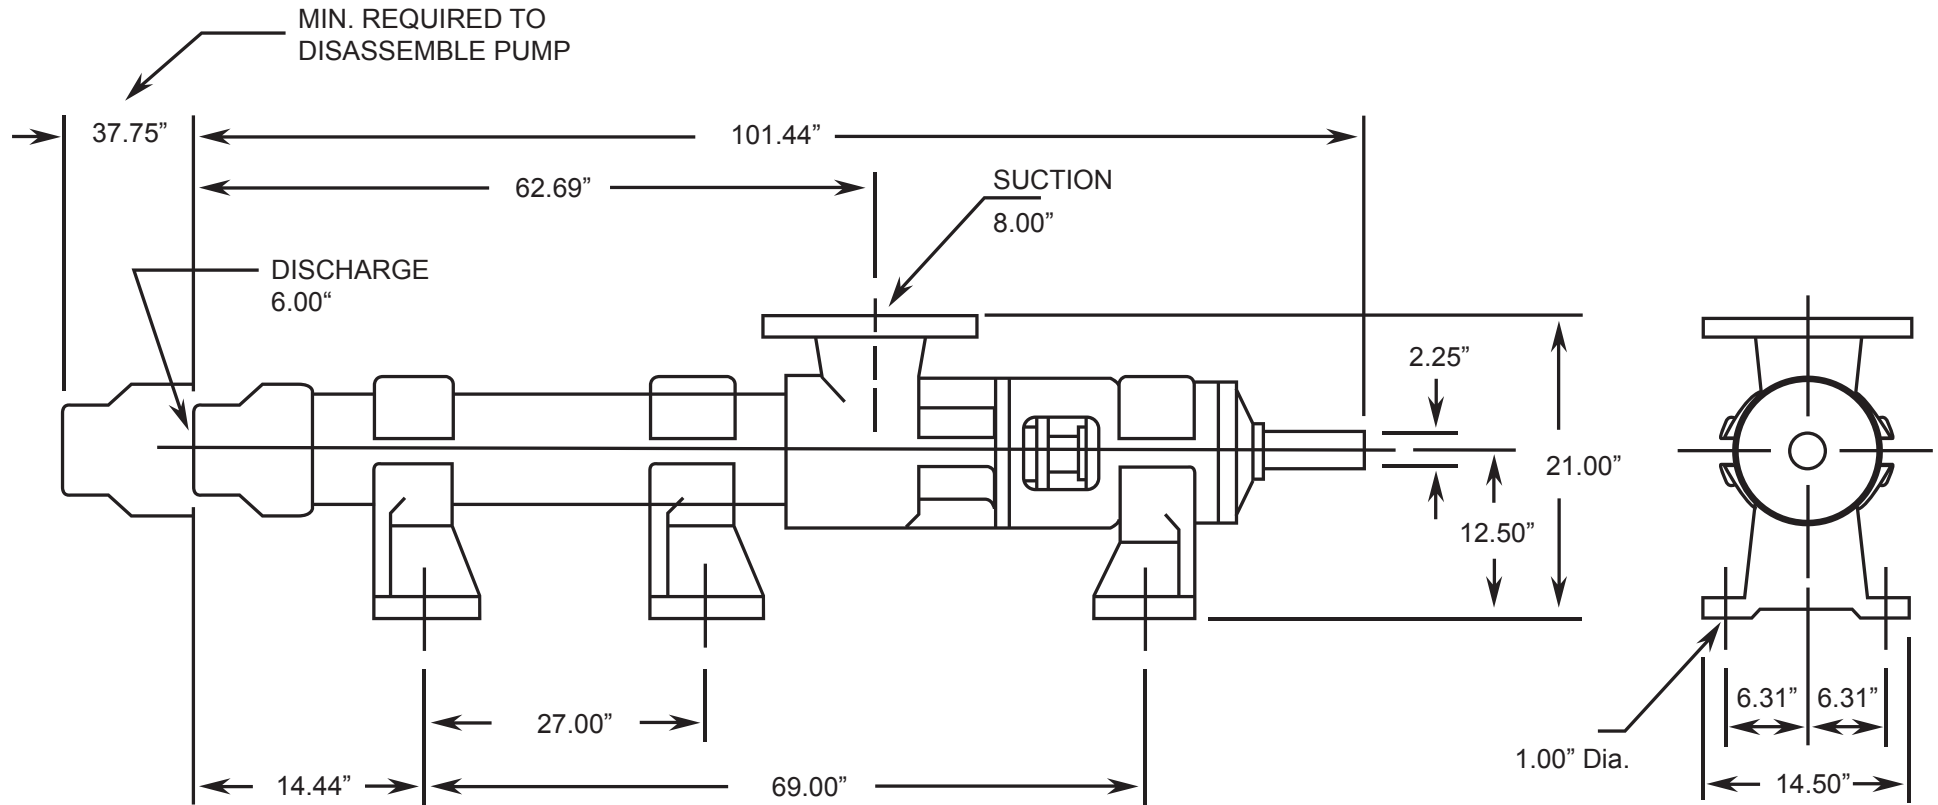

BACK TO TOP

2 Stage Pump

Net weight

≈ lbs.

1205

ALL DIMN: Inches

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005

www.libertyprocess.com